



Wesake™

Ultra-Thin *Thin as a coin* } 1/2"


ULTRA-THIN LED RECESSED PANEL LIGHT

Liteharbor Ultra-thin LED Recessed Panel Light Series for insulated ceiling, including the junction box and driver. The thin profile with spring clips allows for quick and easy installation. Ideal for confined spaces. The small size led panel light in size 4" and 6", in round or square shape.

FIRST PROPOSED THE
CONCEPT OF NEW
CONSTRUCTION
PANEL LIGHT.

Trimless design for the
FIRST time applied
to ultra-thin
panel light.


FIRST gimbal design
used in panel light.

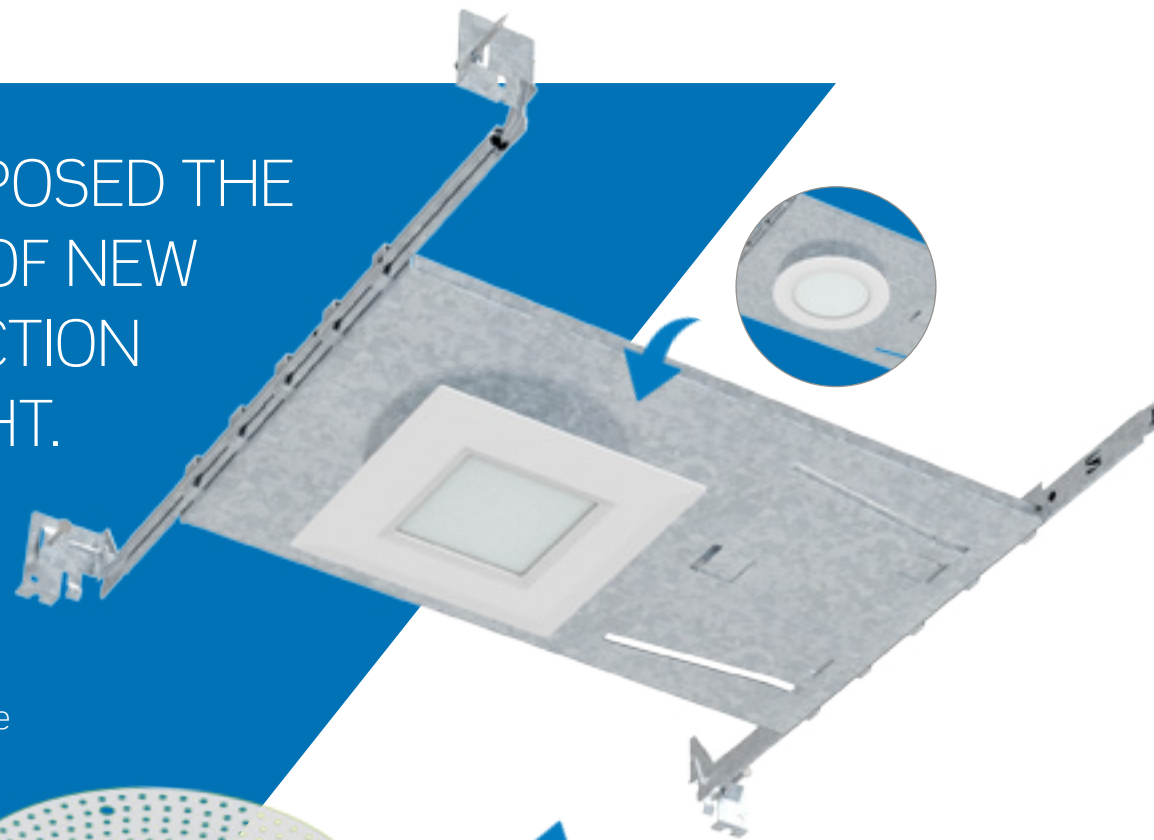

Share a mounting plate with
Square look Round aperture
unique design.



The original design The latest design

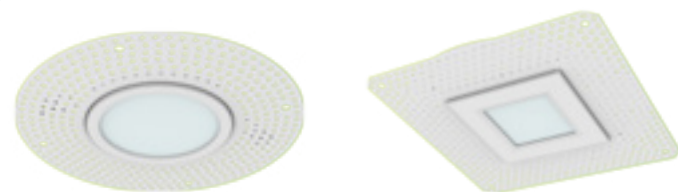

□ Round

□ Square

Round or Square type outer shape is optional.



IC/NON-IC both available.

ULTRA-THIN

1/2"



Wesake™



New Sleek
Design



Back Light Leakage
Prevention




Super Fast
Mounting Clips



High Efficiency
Driver

PARTS LIST

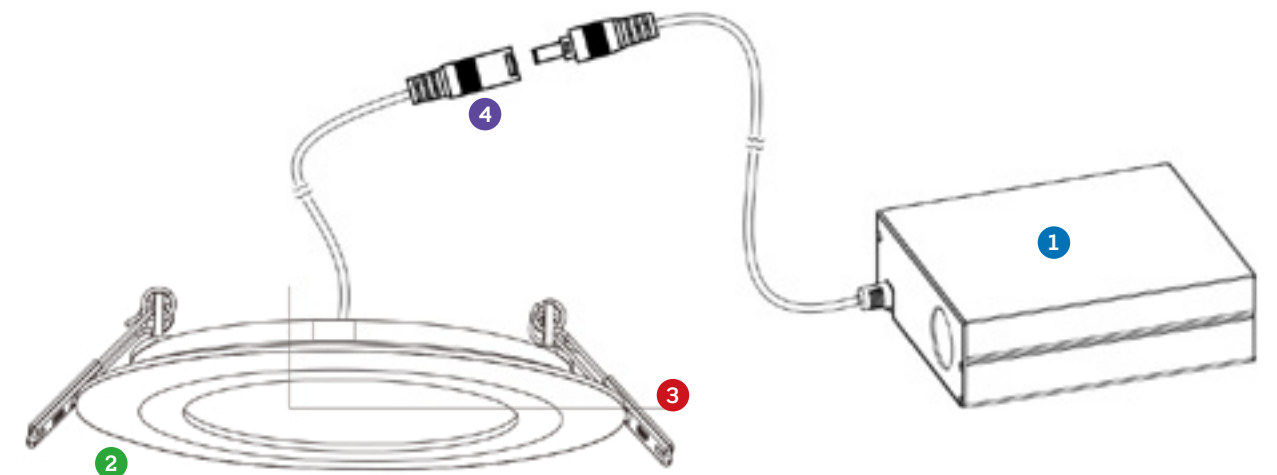


1 Junction Box & Driver

2 Light Panel

3 Spring Clips

4 Connector


ULTRA-THIN LED RECESSED PANEL LIGHT

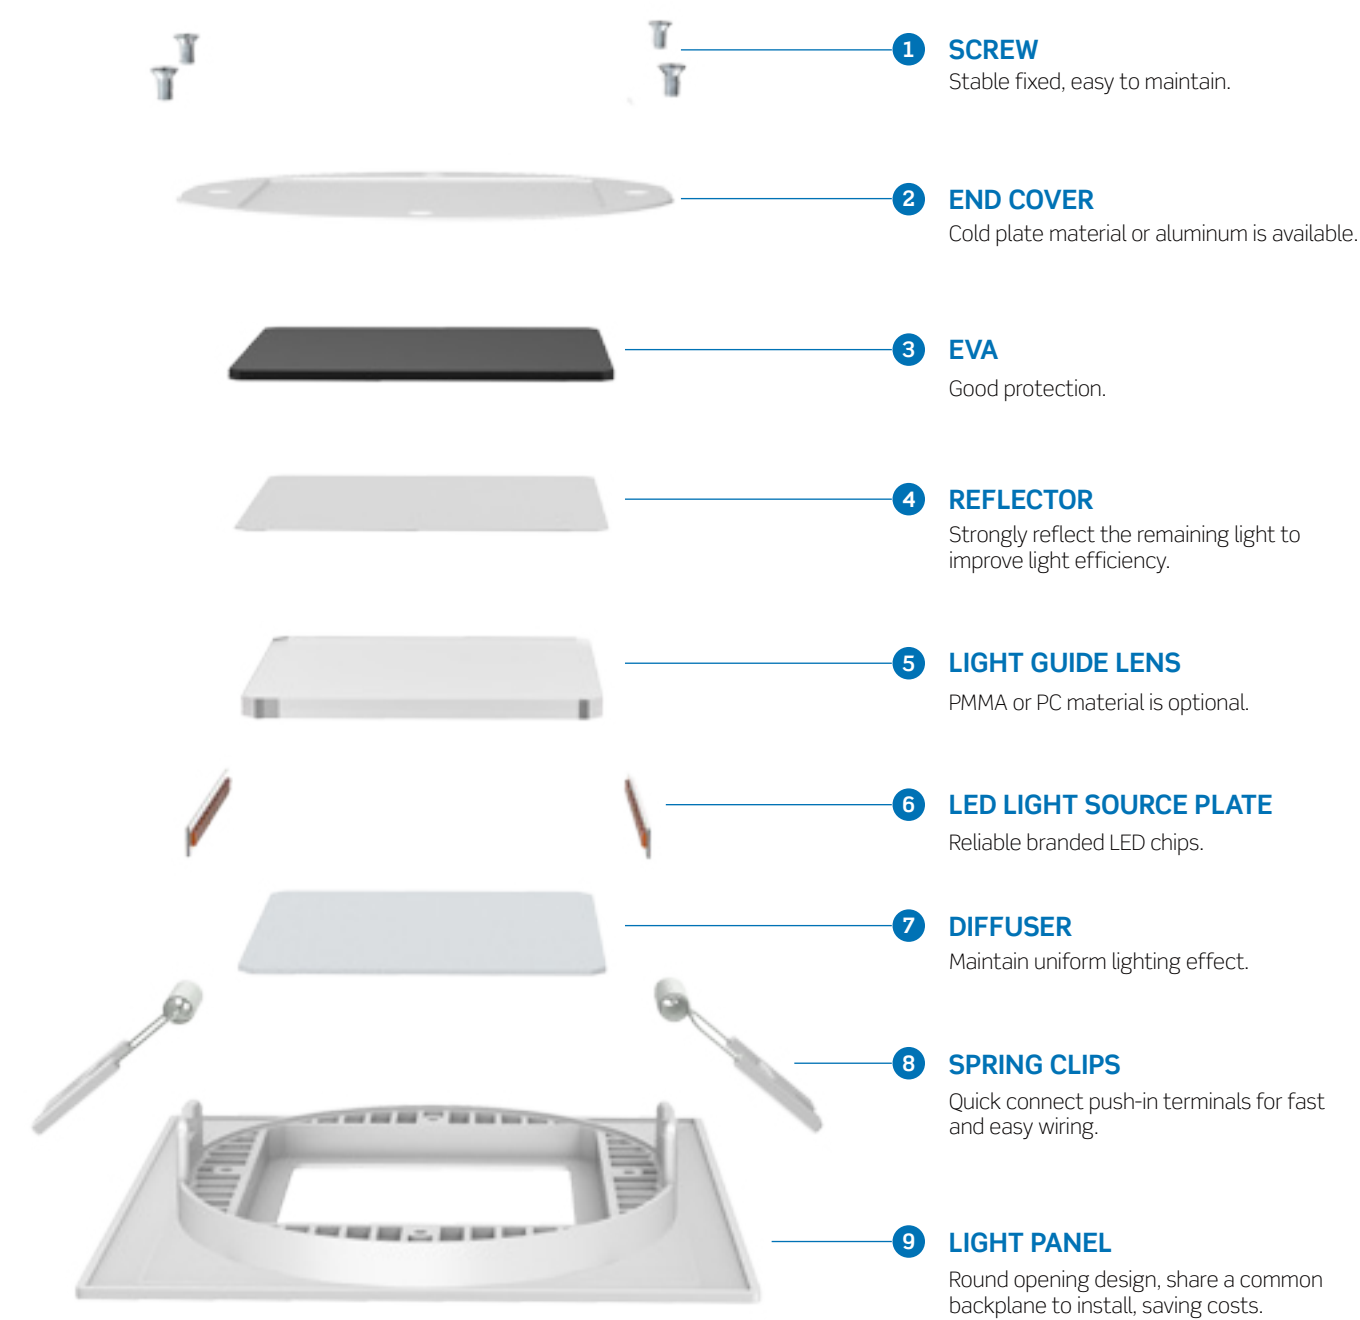

All Liteharbor Panels are offered with 3-Year limited warranty. A robust sleek design, state-of-the-art engineering and a rigorous testing regimen are all factors that make our products so reliable. All the LED panel lights are cETLus listed. They can be well sold in North America market.


INSTALLATION INSTRUCTIONS

Turn power OFF from the electrical panel prior to installation.

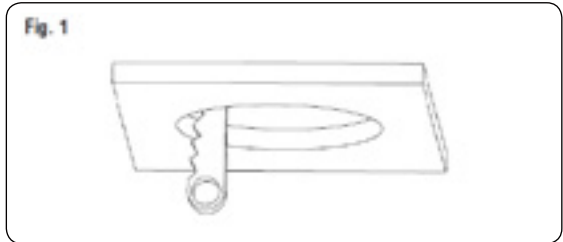


- Determine the location for installation and cut ceiling hole in accordance with cut-hole dimensions. Refer to hole diameter table for appropriate sizes.

Fig. 1

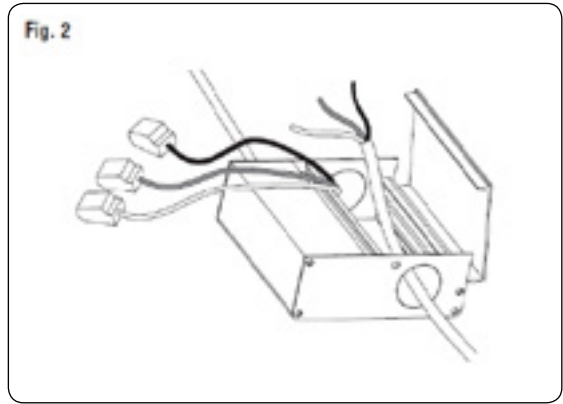


- Open the junction box cover and remove the appropriate knockout(s) on the side panel. (Fig. 2)
- Insert the electrical supply cable through the knockout and secure with a cable connector (sold separately).
- Using quick-connect push-in terminals, connect the ground wire to the green wire terminal; black wire to black wire terminal; white wire to white wire terminal.

Fig. 2

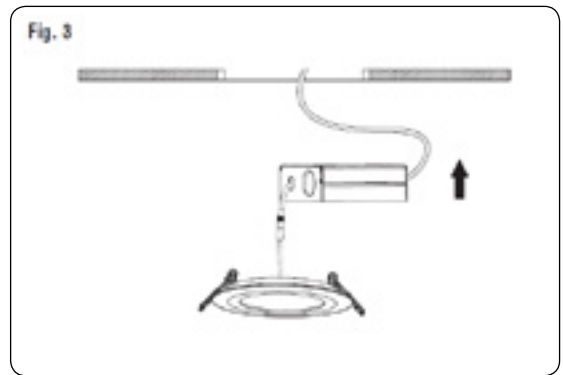

- Place all wiring and connections back in to the box and close the cover. Connect the driver to the light panel.
- Insert junction box through the mounting hole.

Fig. 3

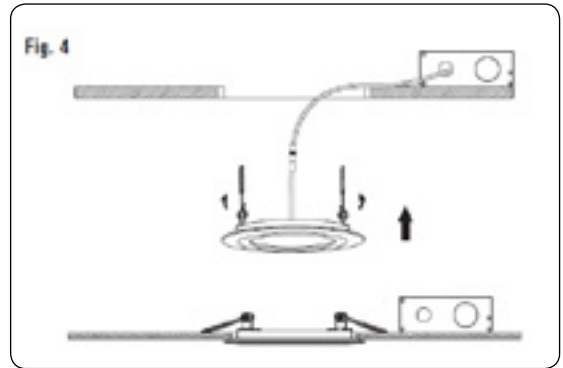

- Push spring-loaded clips on the fixture upwards and insert fixture base in to the mounting hole. Release the clips and fixture will be pulled flush to the ceiling.

Fig. 4

3" ULTRA THIN RECESSED LED PANEL LIGHT

LIGHT SOURCE SMD CHIPS **BL3-301**



BL3-301 | Remodel



BL3-301-NC
New Construction

DESCRIPTION

This 3 inch 6W ultra thin recessed LED panel light, is a kind of high performance and easy installation residential downlight, provides smooth and gentle light output, efficient energy saving. Using two clips to install, easy for installation and saving time, tool-free, no need housing, suitable for 1/2"to 1 1/4" ceiling thickness. Using FT4 cable, with quick anti-pull connecting terminal, good anti-pull performance. Streamlined panels, the lamp is concise and beautiful. Dimmable, compatible dimmer, can match the multi-brand dimmer, good dimming effect (stability, no flickering) Application: Automotive and Parking, Education, Government, Healthcare, Hospitality, Offices and Banks, Religious, Retail)

LAMP BODY


Aluminum die casting, high thermal conductivity, superior heat dissipation performance,the lower light decline, prolong the life of lamps, white powder, paint processing, durable and colorfast.

LIGHT SOURCE

Using top brand 2835 SMD LED light source, chip is durable and stability, superior performance and luminous uniform, high lumen, the light color consistency is good, low light decline, long lifespan; Life Rated for 36000 hours at 70% lumen maintenance.



DIMENSIONS

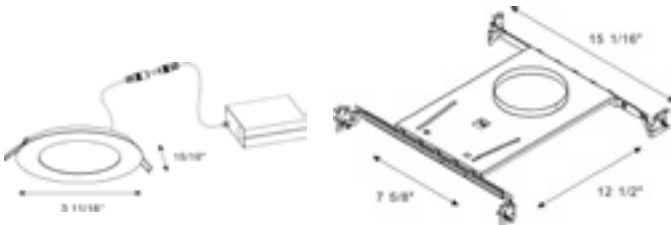

Remodel

New Construction

ORDERING GUIDE / YOUR PRODUCT CODE

SERIES	MOUNTING	TRIM	INPUT VOLTAGE	CCT	DIMMABLE	FINISH
○ BL3-301 3" Round Recessed LED Panel	○ Remodel ○ New Construction	○ Trimmed ○ Trimless	○ 120V ○ 277V	○ 2700K	○ Non-Dimmable ○ Dimmable	○ White ○ Black ○ Satin Nickel
				○ 3000K		
				○ 4000K		
				○ 5000K		
				○ 6000K		

* Customized Also Available

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through. 3 Years Limited Warranty.




3" ULTRA THIN RECESSED SQUARE LED PANEL LIGHT

LIGHT SOURCE SMD CHIPS **BL3-S301**



BL3-S301 | Remodel

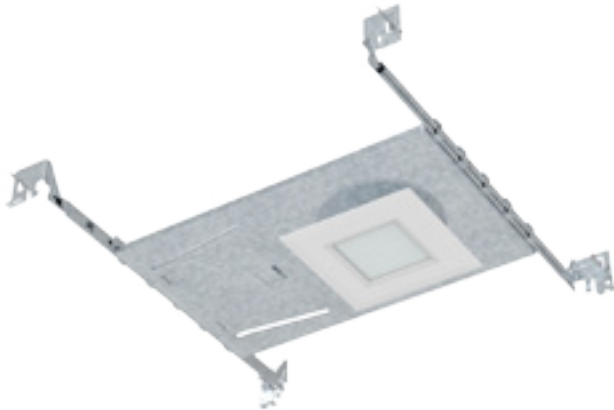

BL3-S301-NC
New Construction

※ Square and Round Items share one mounting plate of round aperture.

DESCRIPTION

This 3 inch 6W ultra thin recessed LED panel light, is a kind of high performance and easy installation residential downlight, provides smooth and gentle light output, efficient energy saving. Using two clips to install, easy for installation and saving time, tool-free, no need housing, suitable for 1/2"to 1 1/4" ceiling thickness. Using FT4 cable, with quick anti-pull connecting terminal, good anti-pull performance. Streamlined panels, the lamp is concise and beautiful. Dimmable, compatible dimmer, can match the multi-brand dimmer, good dimming effect (stability, no flickering) Application: Automotive and Parking, Education, Government, Healthcare, Hospitality, Offices and Banks, Religious, Retail)

LAMP BODY


Aluminum die casting, high thermal conductivity, superior heat dissipation performance,the lower light decline, prolong the life of lamps, white powder, paint processing, durable and colorfast.

LIGHT SOURCE

Using top brand 2835 SMD LED light source, chip is durable and stability, superior performance and luminous uniform, high lumen, the light color consistency is good, low light decline, long lifespan; Life Rated for 36000 hours at 70% lumen maintenance.



DIMENSIONS

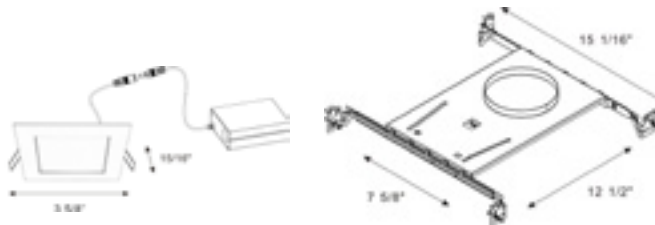

Remodel

New Construction

ORDERING GUIDE / YOUR PRODUCT CODE

SERIES	MOUNTING	TRIM	INPUT VOLTAGE	CCT	DIMMABLE	FINISH
○ BL3-S301 3" Square Recessed LED Panel	○ Remodel ○ New Construction	○ Trimmed ○ Trimless	○ 120V ○ 277V	○ 2700K	○ Non-Dimmable ○ Dimmable	○ White ○ Black ○ Satin Nickel
				○ 3000K		
				○ 4000K		
				○ 5000K		
				○ 6000K		

* Customized Also Available

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through. 3 Years Limited Warranty.



4" ULTRA-THIN ROUND LED RECESSED PANEL LIGHT



BL4-301



BL4-301 | Remodel



BL4-301-NC
New Construction

DESCRIPTION

This ultra thin recessed LED Panel is absolutely perfect for tight spaces, soffits and insulated and dropped ceilings. Recessed 4" Round LED Panel with integral driver in connection box. Fits where no other recessed fixture can. This LED is 10 watts and replaces a 50 watt halogen save up to 80% energy for same light output. The thin panel profile with spring clips allows for quick and easy installation. Ideal for confined spaces and suitable for damp locations.

FEATURES


Available in All 4" Round Openings
Retrofit or New Construction 1/2" Thin - Install Directly Under Joists, Maximum Layout Flexibility
Comes with Junction Box & Driver, No Housing Required Fast & Easy To Install

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. 2" Above Ceiling Clearance Required For Driver.



DIMENSIONS

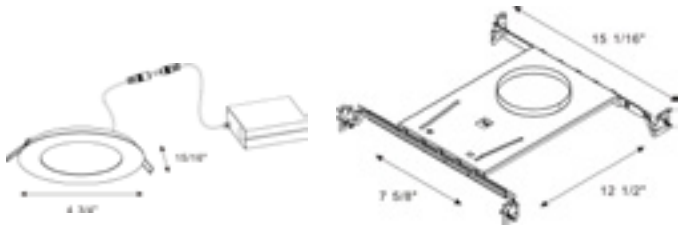

Remodel

New Construction

ORDERING GUIDE / YOUR PRODUCT CODE

SERIES	MOUNTING	TRIM	INPUT VOLTAGE	CCT	DIMMABLE	FINISH
○ BL4-301 4" Round Recessed LED Panel	○ Remodel	○ Trimmed	○ 120V	○ 2700K	○ Non-Dimmable	○ White
		○ Trimless	○ 277V	○ 3000K		○ Black
	○ New Construction			○ 4000K		○ Satin Nickel
				○ 5000K		
				○ 6000K		

* Customized Also Available

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through. 3 Years Limited Warranty.




4" ULTRA-THIN SQUARE LED RECESSED PANEL LIGHT



BL4-S301



BL4-S301 | Remodel

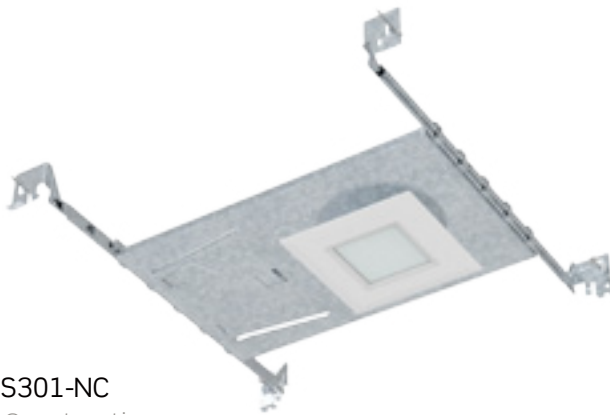

BL4-S301-NC
New Construction

※ Square and Round Items share one mounting plate of round aperture.

DESCRIPTION

This ultra thin recessed LED Panel is absolutely perfect for tight spaces, soffits and insulated and dropped ceilings. Recessed 4" Round LED Panel with integral driver in connection box. Fits where no other recessed fixture can. This LED is 10 watts and replaces a 50 watt halogen save up to 80% energy for same light output. The thin panel profile with spring clips allows for quick and easy installation. Ideal for confined spaces and suitable for damp locations.

FEATURES


Available in All 4" Round Openings.
Retrofit or New Construction Install Directly Under Joists, Maximum Layout Flexibility.
Comes with Junction Box & Driver, No Housing Required Fast & Easy To Install.

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. 2" Above Ceiling Clearance Required For Driver.



DIMENSIONS

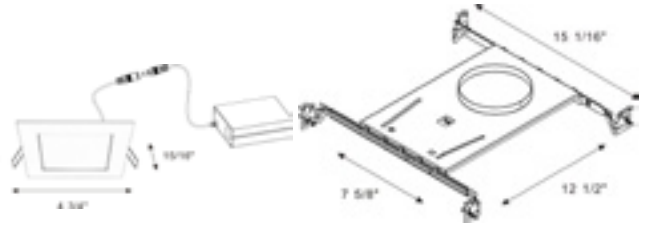

Remodel

New Construction

ORDERING GUIDE / YOUR PRODUCT CODE

SERIES	MOUNTING	TRIM	INPUT VOLTAGE	CCT	DIMMABLE	FINISH
○ BL4-S301 4" Square Recessed LED Panel	○ Remodel	○ Trimmed	○ 120V	○ 2700K	○ Non-Dimmable	○ White
		○ Trimless	○ 277V	○ 3000K		○ Black
	○ New Construction			○ 4000K		○ Satin Nickel
				○ 5000K		
				○ 6000K		

* Customized Also Available

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through. 3 Years Limited Warranty.



6" ULTRA-THIN ROUND LED RECESSED PANEL LIGHT

 **BL6-301**



BL6-301 | Remodel

DESCRIPTION

This ultra thin recessed LED Panel is absolutely perfect for tight spaces, soffits and insulated and dropped ceilings. Recessed 6" round LED Panel with integral driver in connection box. Fits where no other recessed fixture can. This LED is 12 watts and replaces a 65 watt halogen save up to 80% energy for same light output. The thin panel profile with spring clips allows for quick and easy installation. Ideal for confined spaces and suitable for damp locations.

FEATURES

Available in All 6" Round Openings
Retrofit or New Construction Install Directly Under Joists, Maximum Layout Flexibility.
Comes with Junction Box & Driver, No Housing Required Fast & Easy To Install.


MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. 2" Above Ceiling Clearance Required For Driver.



BL6-301-NC
New Construction

DIMENSIONS

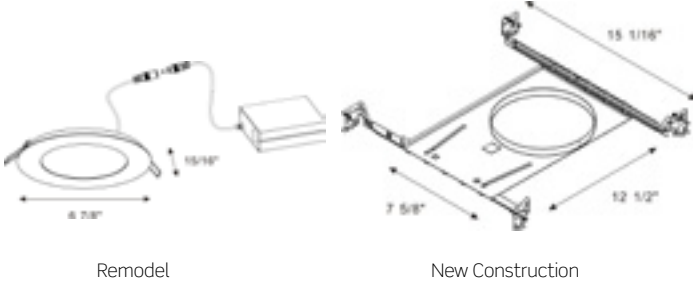

ORDERING GUIDE / YOUR PRODUCT CODE

SERIES	MOUNTING	TRIM	INPUT VOLTAGE	CCT	DIMMABLE	FINISH
<input type="radio"/> BL6-301 6" Round Recessed LED Panel	<input type="radio"/> Remodel <input type="radio"/> New Construction	<input type="radio"/> Trimmed <input type="radio"/> Trimless	<input type="radio"/> 120V <input type="radio"/> 277V	<input type="radio"/> 2700K <input type="radio"/> 3000K <input type="radio"/> 4000K <input type="radio"/> 5000K <input type="radio"/> 6000K	<input type="radio"/> Non-Dimmable <input type="radio"/> Dimmable	<input type="radio"/> White <input type="radio"/> Black <input type="radio"/> Satin Nickel

* Customized Also Available

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through. 3 Years Limited Warranty.



6" ULTRA-THIN SQUARE LED RECESSED PANEL LIGHT

 **BL6-S301**



BL6-S301 | Remodel

DESCRIPTION



This ultra thin recessed LED Panel is absolutely perfect for tight spaces, soffits and insulated and dropped ceilings. Recessed 6" Square LED Panel with integral driver in connection box. Fits where no other recessed fixture can. This LED is 12 watts and replaces a 65 watt halogen save up to 80% energy for same light output. The thin panel profile with spring clips allows for quick and easy installation. Ideal for confined spaces and suitable for damp locations.

FEATURES

Available in All 6" Round Openings
Retrofit or New Construction Install Directly Under Joists, Maximum Layout Flexibility.
Comes with Junction Box & Driver, No Housing Required Fast & Easy To Install.

MOUNTING


Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. 2" Above Ceiling Clearance Required For Driver.

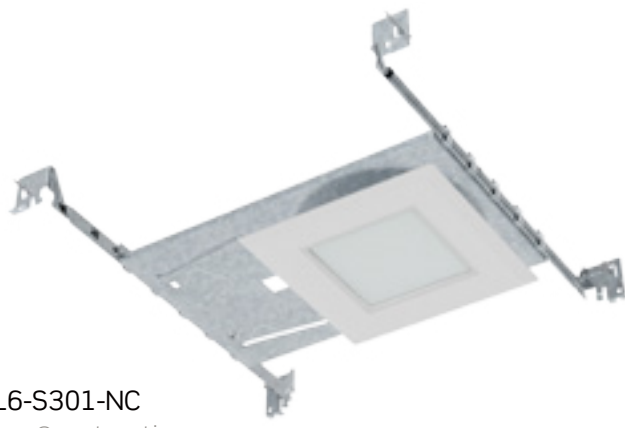

BL6-S301-NC
New Construction

※ Square and Round Items share one mounting plate of round aperture.

DIMENSIONS

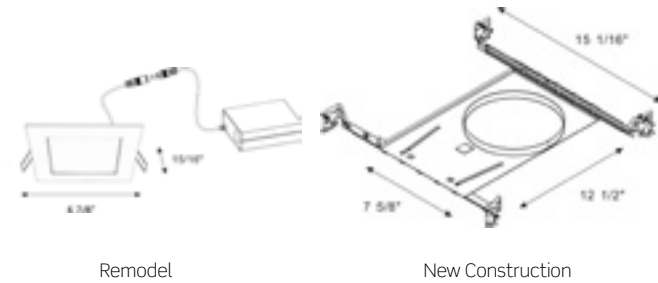

ORDERING GUIDE / YOUR PRODUCT CODE

SERIES	MOUNTING	TRIM	INPUT VOLTAGE	CCT	DIMMABLE	FINISH
<input type="radio"/> BL6-S301 6" Square Recessed LED Panel	<input type="radio"/> Remodel <input type="radio"/> New Construction	<input type="radio"/> Trimmed <input type="radio"/> Trimless	<input type="radio"/> 120V <input type="radio"/> 277V	<input type="radio"/> 2700K <input type="radio"/> 3000K <input type="radio"/> 4000K <input type="radio"/> 5000K <input type="radio"/> 6000K	<input type="radio"/> Non-Dimmable <input type="radio"/> Dimmable	<input type="radio"/> White <input type="radio"/> Black <input type="radio"/> Satin Nickel

* Customized Also Available

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through. 3 Years Limited Warranty.





Xi Zhou

ULTRA-THIN GIMBAL

ULTRA-THIN GIMBAL LED RECESSED LIGHT

Liteharbor Ultra-thin LED Gimbal Recessed Panel Light Series for Insulated Ceiling, including the junction box and driver. Gimbal LED Series is designed for 9° tilt. The thin profile with spring clips allows for quick and easy installation. Ideal for confined spaces. The small size led panel light in size 4" and 6", in round shape.

3" SUPER-THIN GIMBAL LED RECESSED PANEL LIGHT



BL3-007 | Remodel



BL3-007-NC
New Construction



BL3-007-IA
IC airtight option

DESCRIPTION

The 6W super-thin gimbal recessed panel light is a high performance, easy installation of the residential lighting. Provides a good light output, good light, smooth and soft, high efficiency and energy saving. Using aluminum casting, good heat dissipation, simple and beautiful modelling of appearance. Dimmable, good compatibility matched with multi-brand dimmers, dimming stable and even, no strobe. Easy installation and time-saving, tool-free, no housing. New construction optional. The innovation type gimbal panel light, adjustable lighting direction, meet the demand for multiple lighting.

SPECIFICATION


Wattage: 6W
Input Voltage: 120V



MOUNTING CLIPS OPTIONAL



DIMENSIONS

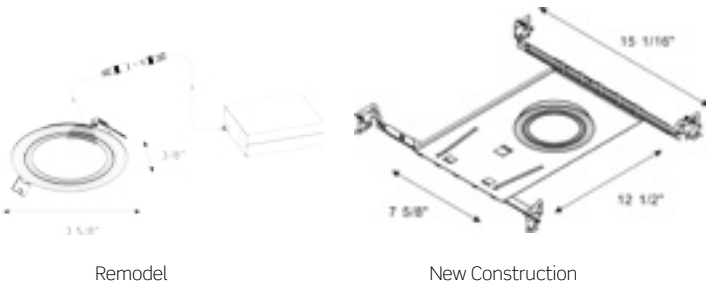

ORDERING GUIDE / YOUR PRODUCT CODE

SERIES	MOUNTING	TRIM	CCT	DIMMABLE	FINISH	MOUNTING CLIPS OPTIONAL
<input type="radio"/> BL3-007 3" Gimbal Panel Light	<input type="radio"/> Remodel <input type="radio"/> New Construction <input type="radio"/> IC airtight	<input type="radio"/> Trimmed <input type="radio"/> Trimless	<input type="radio"/> 2700K <input type="radio"/> 3000K <input type="radio"/> 3500K <input type="radio"/> 4100K	<input type="radio"/> Non-Dimmable <input type="radio"/> Dimmable	<input type="radio"/> White <input type="radio"/> Black <input type="radio"/> Satin Nickel	<input type="radio"/> Option 1 <input type="radio"/> Option 2 (Reference to the following page)

* Customized Also Available

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through.
3 Years Limited Warranty.



4" ULTRA-THIN GIMBAL LED RECESSED LIGHT



BL4-007 | Remodel



BL4-007-NC
New Construction



BL4-007-IA
IC airtight option

DESCRIPTION

This ultra thin recessed LED Panel is absolutely perfect for tight spaces, soffits and insulated and dropped ceilings. Recessed 4" Round LED Panel with integral driver in connection box. Fits where no other recessed fixture can. This LED is 9 watts and replaces a 50 watt halogen save up to 80% energy for same light output. The thin panel profile with spring clips allows for quick and easy installation. Ideal for confined spaces and suitable for damp locations.

FEATURES


Available in All 4" Round Openings
Retrofit or New Construction 1/2" Thin - Install Directly Under Joists,
Maximum Layout Flexibility
Comes with Junction Box & Driver, No Housing Required Fast & Easy To Install

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips.
2" Above Ceiling Clearance Required For Driver.



DIMENSIONS

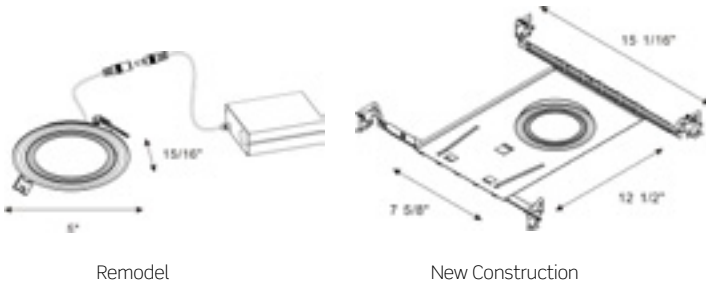

ORDERING GUIDE / YOUR PRODUCT CODE

SERIES	MOUNTING	TRIM	INPUT VOLTAGE	CCT	DIMMABLE	FINISH
<input type="radio"/> BL4-007 4" Gimbal Recessed LED Panel	<input type="radio"/> Remodel <input type="radio"/> New Construction <input type="radio"/> IC airtight	<input type="radio"/> Trimmed <input type="radio"/> Trimless	<input type="radio"/> 120V <input type="radio"/> 277V	<input type="radio"/> 2700K <input type="radio"/> 3000K <input type="radio"/> 4000K <input type="radio"/> 5000K <input type="radio"/> 6000K	<input type="radio"/> Non-Dimmable <input type="radio"/> Dimmable	<input type="radio"/> White <input type="radio"/> Black <input type="radio"/> Satin Nickel

* Customized Also Available

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through.
3 Years Limited Warranty.



6" ULTRA-THIN GIMBAL LED RECESSED LIGHT



BL6-007



BL6-007 | Remodel



BL6-007-NC
New Construction



BL6-007-IA
IC airtight option

※ Square and Round Items share one mounting plate of round aperture.

DESCRIPTION


This ultra thin recessed LED Panel is absolutely perfect for tight spaces, soffits and insulated and dropped ceilings. Recessed 6" Round LED Panel with integral driver in connection box. Fits where no other recessed fixture can. This LED is 12 watts and replaces a 65 watt halogen save up to 80% energy for same light output. The thin panel profile with spring clips allows for quick and easy installation. Ideal for confined spaces and suitable for damp locations.

FEATURES


Available in All 6" Round Openings
Retrofit or New Construction 1/2" Thin - Install Directly Under Joists,
Maximum Layout Flexibility
Comes with Junction Box & Driver, No Housing Required Fast & Easy To Install

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips.
2" Above Ceiling Clearance Required For Driver.



DIMENSIONS

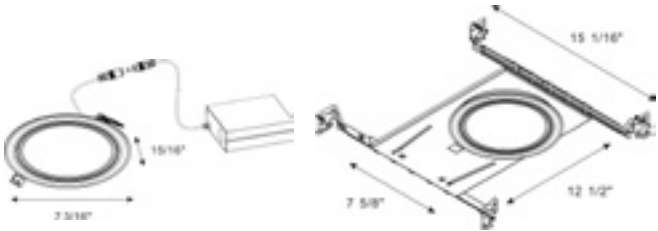

Remodel

New Construction


ORDERING GUIDE / YOUR PRODUCT CODE

SERIES	MOUNTING	TRIM	INPUT VOLTAGE	CCT	DIMMABLE	FINISH
○ BL6-007 6" Gimbal Recessed LED Panel	○ Remodel ○ New Construction ○ IC airtight	○ Trimmed ○ Trimless	○ 120V ○ 277V	○ 2700K ○ 3000K ○ 4000K ○ 5000K ○ 6000K	○ Non-Dimmable ○ Dimmable	○ White ○ Black ○ Satin Nickel

* Customized Also Available

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through.
3 Years Limited Warranty.

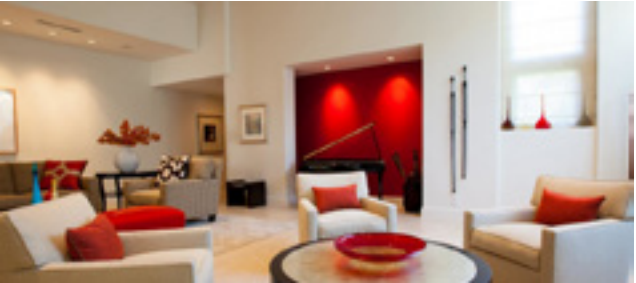

SLEEK DESIGN LED DOME LIGHT SERIES

Liteharbor LED Dome Light Series is designed to reduce targeting and improve design for better quality light. Gentle light comes out after reflected through reflector, to achieve soft lighting without seeing the light source, replaced direct lighting, like a moon hanging on the ceiling. Lights are available with LED Lighting technology and offer a stylish sleek appearance.

4" ROUND RECESSED LED DOME LIGHT

LIGHT SOURCE
SMD CHIPS

BL4-401



BL4-401 | Remodel



BL4-401-NC
New Construction

DESCRIPTION


Liteharbor Interior Dome Lights are designed to reduce targeting and improve design for better quality light.
Gentle light comes out after reflected through reflector, to achieve soft lighting without seeing the light source,
replaced direct lighting, like a moon hanging on the ceiling.
Lights are available with LED Lighting technology and offer a stylish sleek appearance.

FEATURES

Achieve soft lighting without seeing the light source. No glare and light pollution.
Die cast aluminum body material with good heat dissipation
Higher reflection rate reflector with nano powder sprayed on surface
Use FT4 wire with high flame retardant grade independent drive junction box, easy to replace
Can be installed in 0.5 "to 1.25" thick ceilings safe isolated power supply
Flicker free stable dimming, can be compatible with multi brand dimmers



DIMENSIONS

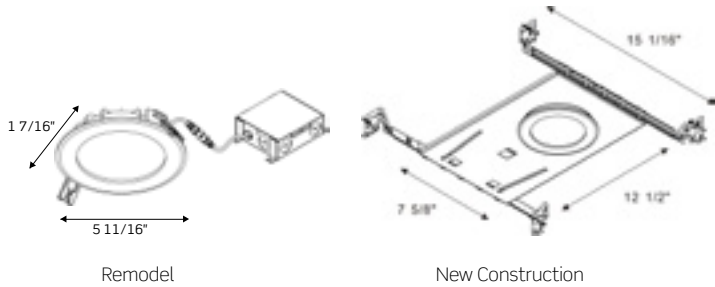

ORDERING GUIDE / YOUR PRODUCT CODE

SERIES	MOUNTING	TRIM	CCT	DIMMABLE	FINISH
○ BL4-401 4" Round Recessed LED Dome Light	○ Remodel ○ New Construction	○ Trimmed ○ Trimless	○ 2700K	○ Non-Dimmable ○ Dimmable	○ White
			○ 3000K		○ Black
			○ 4000K		○ Satin Nickel
			○ 5000K		○ Chrome
			○ 6000K		

* Customized Also Available

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through.
3 Years Limited Warranty.



4" SQUARE RECESSED LED DOME LIGHT

LIGHT SOURCE
SMD CHIPS

BL4-S401



BL4-S401 | Remodel



BL4-S401-NC
New Construction


※ Square and Round Items share one mounting plate of round aperture.

DESCRIPTION


Liteharbor Interior Dome Lights are designed to reduce targeting and improve design for better quality light.
Gentle light comes out after reflected through reflector, to achieve soft lighting without seeing the light source,
replaced direct lighting, like a moon hanging on the ceiling.
Lights are available with LED Lighting technology and offer a stylish sleek appearance.

FEATURES

Achieve soft lighting without seeing the light source. No glare and light pollution.
Die cast aluminum body material with good heat dissipation
Higher reflection rate reflector with nano powder sprayed on surface
Use FT4 wire with high flame retardant grade Independent drive junction box, easy to replace
Can be installed in 0.5 "to 1.25" thick ceilings safe isolated power supply
Flicker free stable dimming, can be compatible with multi brand dimmers



DIMENSIONS

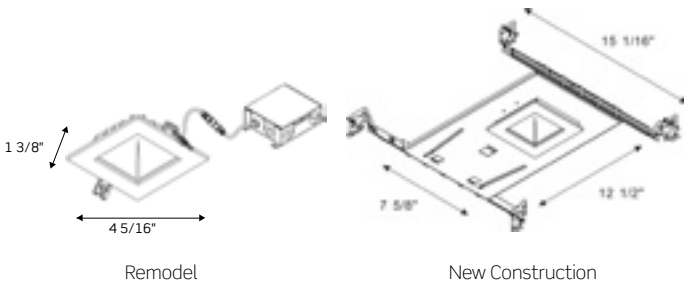

ORDERING GUIDE / YOUR PRODUCT CODE

SERIES	MOUNTING	TRIM	CCT	DIMMABLE	FINISH
○ BL4-S401 4" Square Recessed LED Dome Light	○ Remodel ○ New Construction	○ Trimmed ○ Trimless	○ 2700K	○ Non-Dimmable ○ Dimmable	○ White
			○ 3000K		○ Black
			○ 4000K		○ Satin Nickel
			○ 5000K		○ Chrome
			○ 6000K		

* Customized Also Available

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through.
3 Years Limited Warranty.



6" ROUND RECESSED LED DOME LIGHT



BL6-401 | Remodel

DESCRIPTION


Liteharbor Interior Dome Lights are designed to reduce targeting and improve design for better quality light. Gentle light comes out after reflected through reflector, to achieve soft lighting without seeing the light source, replaced direct lighting, like a moon hanging on the ceiling. Lights are available with LED Lighting technology and offer a stylish sleek appearance.

FEATURES

Achieve soft lighting without seeing the light source. No glare and light pollution.
Die cast aluminum body material with good heat dissipation,
Higher reflection rate reflector with nano powder sprayed on surface
Use FT4 wire with high flame retardant grade Independent drive junction box, easy to replace
Can be installed in 0.5 "to 1.25" thick ceilings safe isolated power supply
Flicker free stable dimming, can be compatible with multi brand dimmers



DIMENSIONS

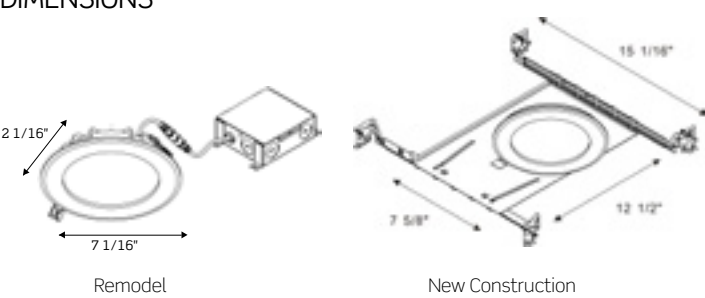

BL6-401-NC
New Construction

ORDERING GUIDE / YOUR PRODUCT CODE

SERIES	MOUNTING	TRIM	CCT	DIMMABLE	FINISH
<input type="radio"/> BL6-401 6" Round Recessed LED Dome Light	<input type="radio"/> Remodel <input type="radio"/> New Construction	<input type="radio"/> Trimmed <input type="radio"/> Trimless	<input type="radio"/> 2700K <input type="radio"/> 3000K <input type="radio"/> 4000K <input type="radio"/> 5000K <input type="radio"/> 6000K	<input type="radio"/> Non-Dimmable <input type="radio"/> Dimmable	<input type="radio"/> White <input type="radio"/> Black <input type="radio"/> Satin Nickel <input type="radio"/> Chrome

* Customized Also Available

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through. 3 Years Limited Warranty.



6" SQUARE RECESSED LED DOME LIGHT



BL6-S401 | Remodel

DESCRIPTION


Liteharbor Interior Dome Lights are designed to reduce targeting and improve design for better quality light. Gentle light comes out after reflected through reflector, to achieve soft lighting without seeing the light source, replaced direct lighting, like a moon hanging on the ceiling. Lights are available with LED Lighting technology and offer a stylish sleek appearance.

FEATURES

Achieve soft lighting without seeing the light source. No glare and light pollution.
Die cast aluminum body material with good heat dissipation
Higher reflection rate reflector with nano powder sprayed on surface
Use FT4 wire with high flame retardant grade Independent drive junction box, easy to replace
Can be installed in 0.5 "to 1.25" thick ceilings safe isolated power supply
Flicker free stable dimming, can be compatible with multi brand dimmers



DIMENSIONS

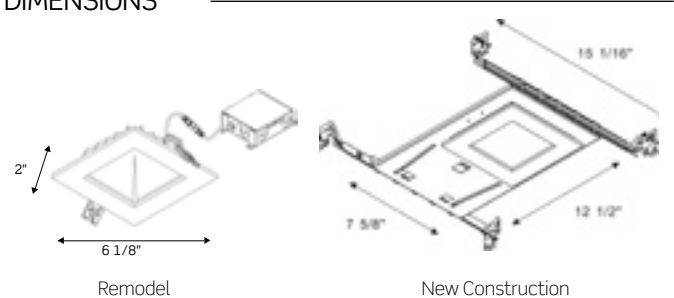

BL6-S401-NC
New Construction

※ Square and Round Items share one mounting plate of round aperture.

ORDERING GUIDE / YOUR PRODUCT CODE

SERIES	MOUNTING	TRIM	CCT	DIMMABLE	FINISH
<input type="radio"/> BL6-S401 6" Square Recessed LED Dome Light	<input type="radio"/> Remodel <input type="radio"/> New Construction	<input type="radio"/> Trimmed <input type="radio"/> Trimless	<input type="radio"/> 2700K <input type="radio"/> 3000K <input type="radio"/> 4000K <input type="radio"/> 5000K <input type="radio"/> 6000K	<input type="radio"/> Non-Dimmable <input type="radio"/> Dimmable	<input type="radio"/> White <input type="radio"/> Black <input type="radio"/> Satin Nickel <input type="radio"/> Chrome

* Customized Also Available

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through. 3 Years Limited Warranty.





ARTISTIC SENSE APPEARANCE

ARTISTIC DESIGN LED RETROFIT TRIM

Liteharbor LED Retrofit Trim Series is designed for recessed mount applications.

This LED retrofit luminaire offers a special-shaped appearance of unique artistic design. Peculiar vortex type outlet of lighting emitting, to ensure that the light is soft, avoid glare. This LED ceiling solution offers a unique irregular shape, makes a deep impression, creates an esthetic feeling for spaces.

3" ROUND RECESSED LED RETROFIT TRIM



BL3-921



BL3-921 | Remodel



BL3-921-NC
New Construction

DESCRIPTION


Use cold forging radiator with good heat dissipation.
Peculiar vortex type outlet, to ensure that the light is soft, avoid glare, unique irregular shape makes an impression.
Independent power supply box, easy to maintain and replace.
Brand chip and isolated power supply, safe and reliable.
Dimming available, can be matched a variety of light regulator, dimming stability, no strobe.

FEATURES

Achieve soft lighting without seeing the light source. No glare and light pollution.
Die cast aluminum body material with good heat dissipation
Higher reflection rate reflector with nano powder sprayed on surface
Use FT4 wire with high flame retardant grade independent drive junction box, easy to replace
Can be installed in 0.5 "to 1.25" thick ceilings safe isolated power supply
Flicker free stable dimming, can be compatible with multi brand dimmers



DIMENSIONS

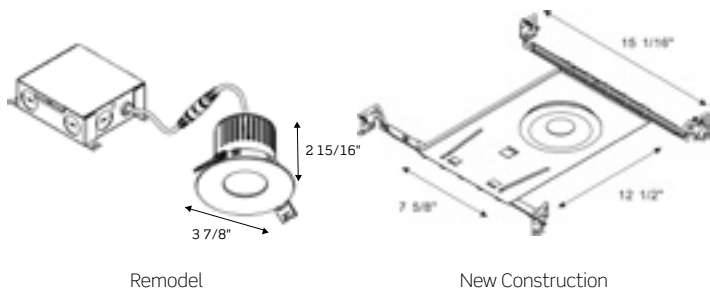

MOUNTING CLIP OPTION



- Two Clips
- No housing required

- MOUNTING CLIPS:
- Available installed in 0.5" to 1.5" thick ceilings.
 - Tool-free type easy installation, save time.


ORDERING GUIDE / YOUR PRODUCT CODE

SERIES	MOUNTING	TRIM	CCT	DIMMABLE	FINISH
<input type="radio"/> BL3-921 3" Round Recessed LED Retrofit Trim	<input type="radio"/> Remodel <input type="radio"/> New Construction	<input type="radio"/> Trimmed <input type="radio"/> Trimless	<input type="radio"/> 2700K <input type="radio"/> 3000K <input type="radio"/> 4000K <input type="radio"/> 5000K <input type="radio"/> 6000K	<input type="radio"/> Non-Dimmable <input type="radio"/> Dimmable	<input type="radio"/> White <input type="radio"/> Black <input type="radio"/> Satin Nickel

* Customized Also Available

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through.
3 Years Limited Warranty.

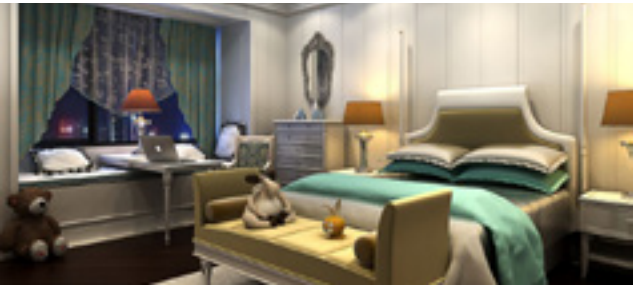

3" SQUARE RECESSED LED RETROFIT TRIM



BL3-S921



BL3-S921 | Remodel



BL3-S921-NC
New Construction

DESCRIPTION


Use cold forging radiator with good heat dissipation.
Peculiar vortex type outlet, to ensure that the light is soft, avoid glare, unique irregular shape makes an impression.
Independent power supply box, easy to maintain and replace.
Brand chip and isolated power supply, safe and reliable.
Dimming available, can be matched a variety of light regulator, dimming stability, no strobe.

FEATURES

Achieve soft lighting without seeing the light source. No glare and light pollution.
Die cast aluminum body material with good heat dissipation
Higher reflection rate reflector with nano powder sprayed on surface
Use FT4 wire with high flame retardant grade independent drive junction box, easy to replace
Can be installed in 0.5 "to 1.25" thick ceilings safe isolated power supply
Flicker free stable dimming, can be compatible with multi brand dimmers



DIMENSIONS

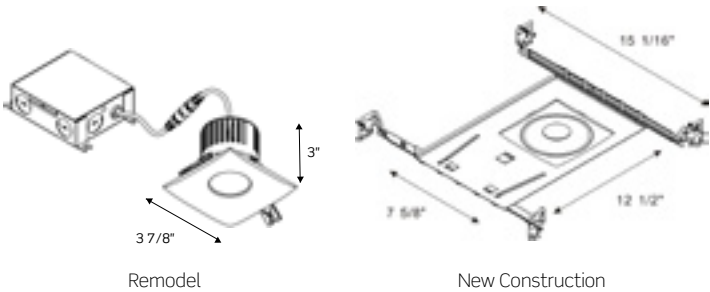

MOUNTING CLIP OPTION



- Two Clips
- No housing required

- MOUNTING CLIPS:
- Available installed in 0.5" to 1.5" thick ceilings.
 - Tool-free type easy installation, save time.

ORDERING GUIDE / YOUR PRODUCT CODE

SERIES	MOUNTING	TRIM	CCT	DIMMABLE	FINISH
<input type="radio"/> BL3-S921 3" Square Recessed LED Retrofit Trim	<input type="radio"/> Remodel <input type="radio"/> New Construction	<input type="radio"/> Trimmed <input type="radio"/> Trimless	<input type="radio"/> 2700K <input type="radio"/> 3000K <input type="radio"/> 4000K <input type="radio"/> 5000K <input type="radio"/> 6000K	<input type="radio"/> Non-Dimmable <input type="radio"/> Dimmable	<input type="radio"/> White <input type="radio"/> Black <input type="radio"/> Satin Nickel

* Customized Also Available

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through.
3 Years Limited Warranty.



4" ROUND RECESSED LED RETROFIT TRIM

 **BL4-921**




BL4-921 | Remodel



BL4-921-NC
New Construction

DIMENSIONS

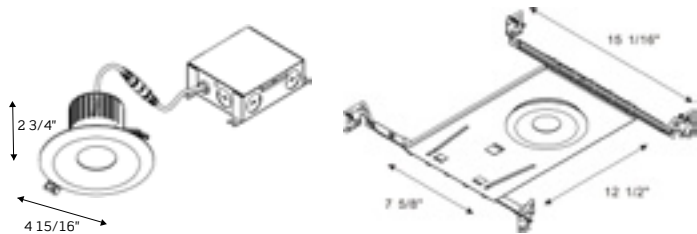

Remodel

New Construction

DESCRIPTION

Use cold forging radiator with good heat dissipation.
Peculiar vortex type outlet, to ensure that the light is soft, avoid glare, unique irregular shape makes an impression.
Independent power supply box, easy to maintain and replace.
Brand chip and isolated power supply, safe and reliable.
Dimming available, can be matched a variety of light regulator, dimming stability, no strobe.

FEATURES

Achieve soft lighting without seeing the light source. No glare and light pollution.
Die cast aluminum body material with good heat dissipation
Higher reflection rate reflector with nano powder sprayed on surface
Use FT4 wire with high flame retardant grade independent drive junction box, easy to replace
Can be installed in 0.5 "to 1.25" thick ceilings safe isolated power supply
Flicker free stable dimming, can be compatible with multi brand dimmers



MOUNTING CLIP OPTION



1

MOUNTING CLIPS:
- Available installed in 0.5" to 1.5" thick ceilings.
- Tool-free type easy installation, save time.

- Two Clips
- No housing required

ORDERING GUIDE / YOUR PRODUCT CODE



SERIES	MOUNTING	TRIM	CCT	DIMMABLE	FINISH
<input type="radio"/> BL4-921 4" Round Recessed LED Retrofit Trim	<input type="radio"/> Remodel <input type="radio"/> New Construction	<input type="radio"/> Trimmed <input type="radio"/> Trimless	<input type="radio"/> 2700K <input type="radio"/> 3000K <input type="radio"/> 4000K <input type="radio"/> 5000K <input type="radio"/> 6000K	<input type="radio"/> Non-Dimmable <input type="radio"/> Dimmable	<input type="radio"/> White <input type="radio"/> Black <input type="radio"/> Satin Nickel

* Customized Also Available

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through.
3 Years Limited Warranty.



4" SQUARE RECESSED LED RETROFIT TRIM

 **BL4-S921**




BL4-S921 | Remodel



BL4-S921-NC
New Construction

※ Square and Round Items share one mounting plate of round aperture.

DIMENSIONS

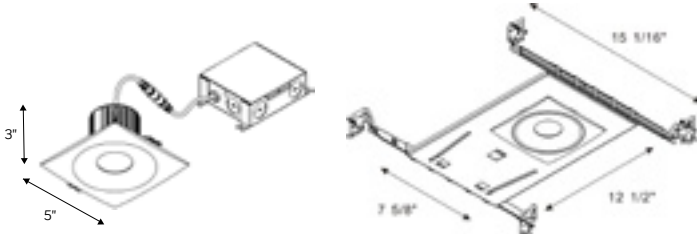

Remodel


New Construction

DESCRIPTION

Use cold forging radiator with good heat dissipation.
Peculiar vortex type outlet, to ensure that the light is soft, avoid glare, unique irregular shape makes an impression.
Independent power supply box, easy to maintain and replace.
Brand chip and isolated power supply, safe and reliable.
Dimming available, can be matched a variety of light regulator, dimming stability, no strobe.

FEATURES

Achieve soft lighting without seeing the light source. No glare and light pollution.
Die cast aluminum body material with good heat dissipation
Higher reflection rate reflector with nano powder sprayed on surface
Use FT4 wire with high flame retardant grade independent drive junction box, easy to replace
Can be installed in 0.5 "to 1.25" thick ceilings safe isolated power supply
Flicker free stable dimming, can be compatible with multi brand dimmers



MOUNTING CLIP OPTION



1

MOUNTING CLIPS:
- Available installed in 0.5" to 1.5" thick ceilings.
- Tool-free type easy installation, save time.

- Two Clips
- No housing required

ORDERING GUIDE / YOUR PRODUCT CODE



SERIES	MOUNTING	TRIM	CCT	DIMMABLE	FINISH
<input type="radio"/> BL4-S921 4" Square Recessed LED Retrofit Trim	<input type="radio"/> Remodel <input type="radio"/> New Construction	<input type="radio"/> Trimmed <input type="radio"/> Trimless	<input type="radio"/> 2700K <input type="radio"/> 3000K <input type="radio"/> 4000K <input type="radio"/> 5000K <input type="radio"/> 6000K	<input type="radio"/> Non-Dimmable <input type="radio"/> Dimmable	<input type="radio"/> White <input type="radio"/> Black <input type="radio"/> Satin Nickel

* Customized Also Available

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through.
3 Years Limited Warranty.



3" SQUARE RECESSED LED RETROFIT TRIM

LIGHT SOURCE
COB LED
BL3-920-S




BL3-920-S | Remodel



BL3-921-S-NC

New Construction

DIMENSIONS

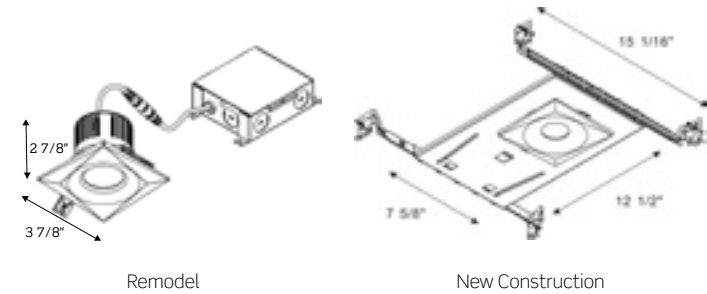

ORDERING GUIDE / YOUR PRODUCT CODE

SERIES	MOUNTING	TRIM	CCT	DIMMABLE	FINISH
<input type="radio"/> BL3-920-S 3" Square Recessed LED Retrofit Trim	<input type="radio"/> Remodel <input type="radio"/> New Construction	<input type="radio"/> Trimmed <input type="radio"/> Trimless	<input type="radio"/> 2700K <input type="radio"/> 3000K <input type="radio"/> 4000K <input type="radio"/> 5000K <input type="radio"/> 6000K	<input type="radio"/> Non-Dimmable <input type="radio"/> Dimmable	<input type="radio"/> White <input type="radio"/> Black <input type="radio"/> Satin Nickel

* Customized Also Available

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through.
3 Years Limited Warranty.



DESCRIPTION

Use cold forging radiator with good heat dissipation.
Peculiar vortex type outlet, to ensure that the light is soft, avoid glare, unique irregular shape makes an impression.
Independent power supply box, easy to maintain and replace.
Brand chip and isolated power supply, safe and reliable.
Dimming available, can be matched a variety of light regulator, dimming stability, no strobe.

FEATURES

Achieve soft lighting without seeing the light source. No glare and light pollution.
Die cast aluminum body material with good heat dissipation
Higher reflection rate reflector with nano powder sprayed on surface
Use FT4 wire with high flame retardant grade independent drive junction box, easy to replace
Can be installed in 0.5 "to 1.25" thick ceilings safe isolated power supply
Flicker free stable dimming, can be compatible with multi brand dimmers



MOUNTING CLIP OPTION



1

MOUNTING CLIPS:
- Available installed in 0.5" to 1.5" thick ceilings.
- Tool-free type easy installation, save time.


- Two Clips
- No housing required

4" SQUARE RECESSED LED RETROFIT TRIM

LIGHT SOURCE
COB LED
BL4-920-S



BL4-920-S | Remodel

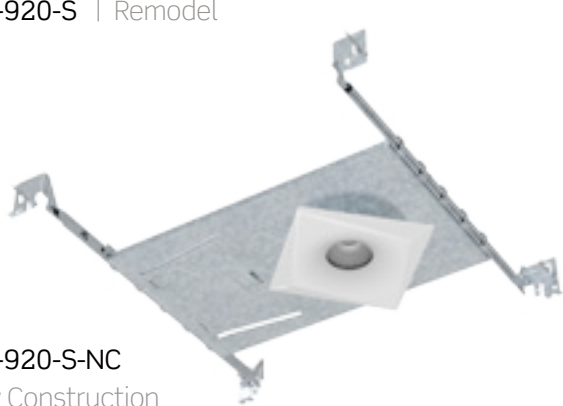


BL4-920-S-NC

New Construction

※ Square and Round Items share one mounting plate of round aperture.

DIMENSIONS

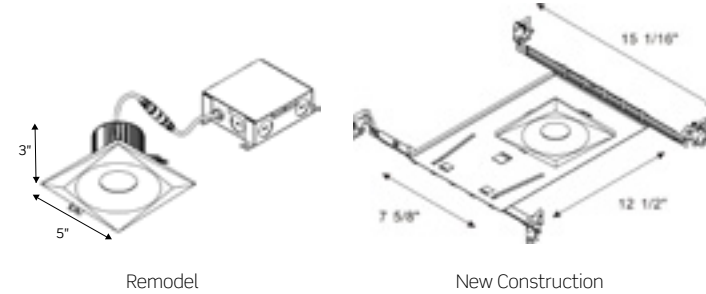

ORDERING GUIDE / YOUR PRODUCT CODE

SERIES	MOUNTING	TRIM	CCT	DIMMABLE	FINISH
<input type="radio"/> BL4-920-S 4" Square Recessed LED Retrofit Trim	<input type="radio"/> Remodel <input type="radio"/> New Construction	<input type="radio"/> Trimmed <input type="radio"/> Trimless	<input type="radio"/> 2700K <input type="radio"/> 3000K <input type="radio"/> 4000K <input type="radio"/> 5000K <input type="radio"/> 6000K	<input type="radio"/> Non-Dimmable <input type="radio"/> Dimmable	<input type="radio"/> White <input type="radio"/> Black <input type="radio"/> Satin Nickel

* Customized Also Available

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through.
3 Years Limited Warranty.




DESCRIPTION

Use cold forging radiator with good heat dissipation.
Peculiar vortex type outlet, to ensure that the light is soft, avoid glare, unique irregular shape makes an impression.
Independent power supply box, easy to maintain and replace.
Brand chip and isolated power supply, safe and reliable.
Dimming available, can be matched a variety of light regulator, dimming stability, no strobe.

FEATURES

Achieve soft lighting without seeing the light source. No glare and light pollution.
Die cast aluminum body material with good heat dissipation
Higher reflection rate reflector with nano powder sprayed on surface
Use FT4 wire with high flame retardant grade independent drive junction box, easy to replace
Can be installed in 0.5 "to 1.25" thick ceilings safe isolated power supply
Flicker free stable dimming, can be compatible with multi brand dimmers



MOUNTING CLIP OPTION



1

MOUNTING CLIPS:
- Available installed in 0.5" to 1.5" thick ceilings.
- Tool-free type easy installation, save time.

- Two Clips
- No housing required